


Namiton CNT-YW120TY Fully Automatic Flap Turnstile

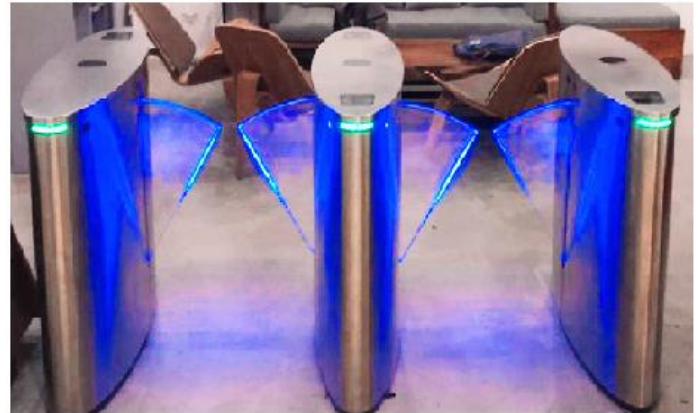

Features:

1. Higher flow rate and better anti-tailgate function .
2. Double protections of mechanical and infrared anti-pinch function. providing more reliable and safer passing.
3. Multi alarm modes: illegal intrusion, anti-intrusion, anti-follow, overtime alarm etc.
4. Anti-rush function, Anti-Reverse, anti-intrusion, anti-follow.
5. LED indicator light: green and red indicate the passing information.
6. Normal open and normal close can be controlled by external button .(for group pass)
7. Auto detect and reset function.
8. Gate auto open when power is off to meet the fire protection requirements.
9. Flap turnstile can be hooked with all kinds of access control systems, upon receiving the relay switch signal.
10. Flap turnstile can be uni-directional or bi-directional control.
11. High adaptability for environment, and good ability for self-protection. Can work properly under all kinds of harsh environment, strong ego-protect ability, can adapt to the weak current short circuit, glare, fog rain and snow, the typhoon weather and climate change.

Flap Barrier Gate Specification:

Housing material International standard 304SS

Dimensions 1200L*320W*1000H mm

Lane width 570mm(Adjustable)

Weight 45-80kg

Passing speed 35-45 people/minute

MCBF 5million times

Input voltage AC220±10% V,50HZ

Driving motor DC 50W/24V

Working environment Indoor and outdoor

Working temperature -40°C—— 80°C

Suitable humidity 5%—— 90%

Barrier arm material and color can be customized.